



■ 符合标准 / Standard

符合IEC60947-5-1 GB14048.5标准
Conform to IEC60947-5-1 GB14048.5 Standard


■ 触点方式 Contact Style



■ 端子描述 Terminal Description




■ 安装尺寸 / Install Size

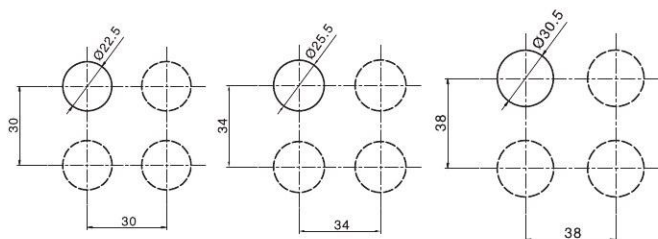

■ 连接器 / Connector

快速连接，安全使用，方便连接，
线长可供定制。

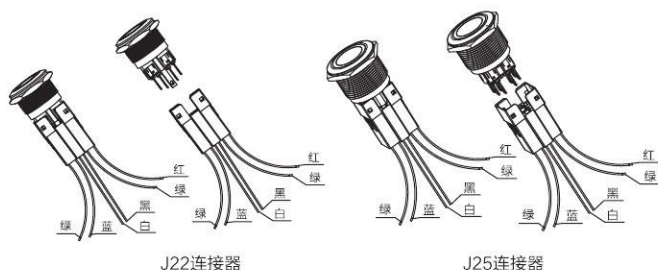

■ 开关结构说明 / Switching Operation

型式 Type	符号 Sign	示意图 Diagram	说明 Explanation
No.2			具有两个端子的双断电慢动触头开关个别产品可定制，Y型常闭开关，详见产品说明 Using two terminals, double-break and slow-motion contact. Y type NC switch can be made to order for individual product, pls check the product description.

■ 额定参数/Rating

工作电压 Working voltage			24V	110V	220V
接触参数 Contact Parameter	AC (50/60Hz)	阻性	—	1.0A	0.5A
		感性	—	0.7A	0.5A
	DC	阻性	1.0A	0.2A	—
		感性	0.7A	0.1A	—

J22/25/30/40金属按钮开关 Metal button switch



■ 特性 / Features

- 安装直径22/25/30mm
- 防护等级：IP65/IP67/IK10
- 触点银镀金：3μ
- LED超高亮冷光源灯显示
- 专用特殊磨砂不锈钢环
- 整体美观，高级，时尚



www.otomasyondeposu.com

J22/25/30金属按钮开关命名方式 The naming definition of J22/25/30 metal push button switch

	—						—	
安装尺寸 Install Size		动作方式 Action Style:	头部形状 Shape of Top:	触点形式 Contact Type:	颜色/Color:	电压/Voltage:		材料/Material:
22mm 25mm 30mm 40mm		2:自复按钮 3:自锁按钮 2:Momentary 3:Maintained	1: 平头 2: 高位头 3: 弧面头 6: 高面带灯 7: 平面带灯 8: 点头带灯 A: 弧面带灯 1: Flat Round 2: High Round 3: Domed 6: High Ring Illumated 7: Ring Illumated 8: Dot Illumated A: Domed Illumated	1:1NO+1NC 2:2NO+2NC	 红色 / Red  绿色 / Green  蓝色 / Blue  白色 / White  黄色 / Yellow	D:24VDC E:12VDC F:6.3VDC A1:110VAC A2:220VAC		Ni:不锈钢 T:铜镀镍 G:铜镀铬 Ni:Stainless steel T: Copper Plated Ni G:Copper plated Cr

注: 常规的定制都是不锈钢外壳, 如需铜镀镍外壳, 请在型号后面加T; 如需铜镀铬外壳, 请在型号后面加G

Note: The regular material is Stainless steel, if you want Copper Plated with Ni, please add T behind, if you want Copper Plated Cr, please add G behind.

Ø12
金属按钮

Ø16
金属按钮

Ø19
金属按钮

Ø22
金属按钮

Ø25
金属按钮

Ø30
金属按钮

Ø40
金属按钮

触点规格 Contact Ratings

额定绝缘电压 Rated insulation voltage			250			
发热电流 Heating current I _{th}			3A温度不超过最大额定值所允许的电流 Temperature does not exceed the maximum allowed current			
额定使用电压 Rated voltage			12V	24V	110V	220V
额定使用电流 Rated current	交流AC 50/60Hz	电阻性负载 Resistive load	—	—	5A	3A
		电感性负载 Inductive load	—	—	3A	2A
	直流DC	电阻性负载 Resistive load	5A	5A	1A	0.5A
		电感性负载 Inductive load	2A	2A	0.2A	0.1A
触点材料Contact material			银镀金Silver Plated Gold			

灯珠规格 Lamp Ratings

灯珠类型Lamp Type	双向LED灯珠(交直流通用) LED lamp(AC/DC)
额定电压Rated Voltage	3V,6V,12V,24V,36V,110V,220VAC/DC
额定电流Rated Current	约15mA 约2mA About 15mA About 2mA
发光颜色LED Color	     
寿命Life	40000小时(参考值) 40000 hours(Reference)
灯珠等效电路 Lamp Circuit diagram	 内置电阻: 采用6V灯珠, 需外接电阻。 采用交直流通用的LED灯珠, 接线端子无正负极区分; 60V以下灯珠已内置保护电阻; Using AC/DC LED lamp, the terminals have no difference of anode and cathode; Using inner resistance for the lamp below 60V. Using 6V lamp when the lamp voltage is above 60V, and need connect outer dropping resistance.

注: 如需单向直流LED灯珠可定做; 其他电压规格可按需求定做。
DC LED and other voltage can be made to order.


Ø25金属防水按钮开关 Metal Waterproof Push Button Switch

名称/外观 Product appearance	带灯形式 Illuminated type	操作类别 Operation	触点 Contact	产品型号 Model	外壳材料 Crust Material
实面圆形 / Flat round 	不带灯 Without LED	自复 Momentary	1NO+1NC	J25-211	Nil:不锈钢 T:铜镀镍 G:铜镀铬 Nil:Stainless steel T: Copper Plated Ni G: Copper plated Cr
			2NO+2NC	J25-212	
		自锁 Maintained	1NO+1NC	J25-311	
			2NO+2NC	J25-312	
高面圆形 / High round 	不带灯 Without LED	自复 Momentary	1NO+1NC	J25-221	
			2NO+2NC	J25-222	
		自锁 Maintained	1NO+1NC	J25-321	
			2NO+2NC	J25-322	
弧面圆形 / Domed round 	不带灯 Without LED	自复 Momentary	1NO+1NC	J25-231	
			2NO+2NC	J25-232	
		自锁 Maintained	1NO+1NC	J25-331	
			2NO+2NC	J25-332	

平钮




单刀/1Pole
双刀/2Pole

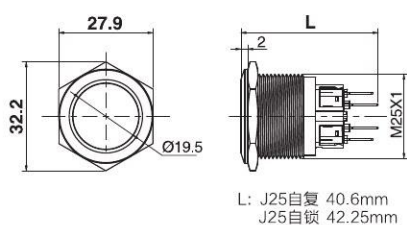

高位钮




单刀/1Pole
双刀/2Pole

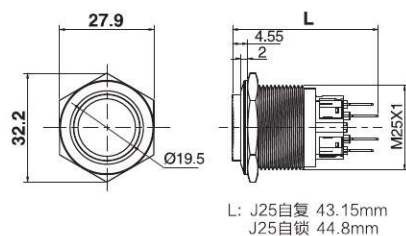

弧钮



单刀/1Pole
双刀/2Pole

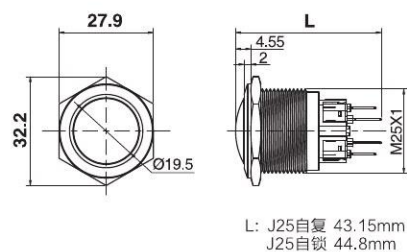

J 系列三色灯金属按钮

带电源符号按钮

金属信号灯

经济型金属按钮

金属按钮

Ø12
金属按钮

Ø16
金属按钮

Ø19
金属按钮

Ø22
金属按钮

Ø25
金属按钮

Ø30
金属按钮


Ø40
金属按钮

Ø25带灯金属防水按钮开关 Metal Waterproof Push Button Switch with LED


名称/外观 Product appearance	带灯形式 Illuminated type	操作类别 Operation	触点 Contact	产品型号 Model	外壳材料 Crust Material	带灯颜色 Color	额定电压 Rated Voltage
	带灯 With LED	自复 Momentary	1NO+1NC	J25-261 □●	Nil:不锈钢 T:铜镀镍 G:铜镀铬 Nil:Stainless steel T: Copper Plated Ni G: Copper plated Cr	请用下列颜色编码 替换型号中的"□" R 红色/Red G 绿色/Green Y 黄色/Yellow W 白色/White B 蓝色/Blue	请用下列颜色编码 替换型号中的"●" D:24VDC E:12VDC F:6.3VDC A1:110VAC A2:220VAC
			2NO+2NC	J25-262 □●			
		自锁 Maintained	1NO+1NC	J25-361 □●			
			2NO+2NC	J25-362 □●			
	带灯 With LED	自复 Momentary	1NO+1NC	J25-271 □●			
			2NO+2NC	J25-272 □●			
		自锁 Maintained	1NO+1NC	J25-371 □●			
			2NO+2NC	J25-372 □●			
	带灯 With LED	自复 Momentary	1NO+1NC	J25-281 □●			
			2NO+2NC	J25-282 □●			
		自锁 Maintained	1NO+1NC	J25-381 □●			
			2NO+2NC	J25-382 □●			
	带灯 With LED	自复 Momentary	1NO+1NC	J25-2A1 □●			
			2NO+2NC	J25-2A2 □●			
		自锁 Maintained	1NO+1NC	J25-3A1 □●			
			2NO+2NC	J25-3A2 □●			

Ø12
金属按钮Ø16
金属按钮Ø19
金属按钮Ø22
金属按钮Ø25
金属按钮Ø30
金属按钮Ø40
金属按钮


高位钮带灯

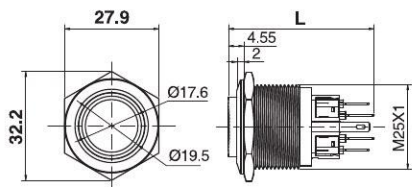单刀/1Pole
双刀/2PoleL: J25自复 43.15mm
J25自锁 44.8mm


平钮带灯

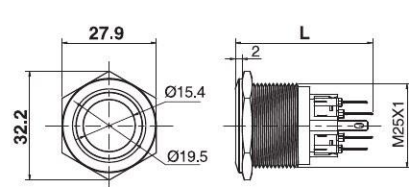单刀/1Pole
双刀/2PoleL: J25自复 40.6mm
J25自锁 42.25mm

平钮带点头灯

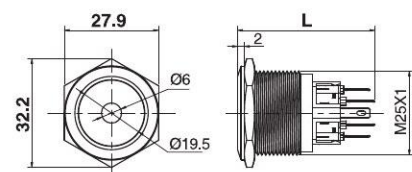单刀/1Pole
双刀/2PoleL: J25自复 40.6mm
J25自锁 42.25mm

弧钮带灯

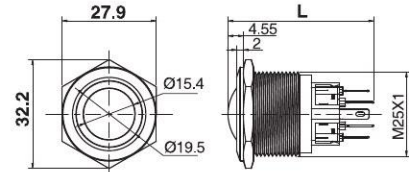单刀/1Pole
双刀/2PoleL: J25自复 43.15mm
J25自锁 44.8mm